


## Tailgate Guard Honda CRV 2018> Fitting Instructions


Before starting the fitting please read the instructions fully and familiarise yourself with the parts delivered with the guard. Barjo recommends the fitter has an assistant to help fit the guard.

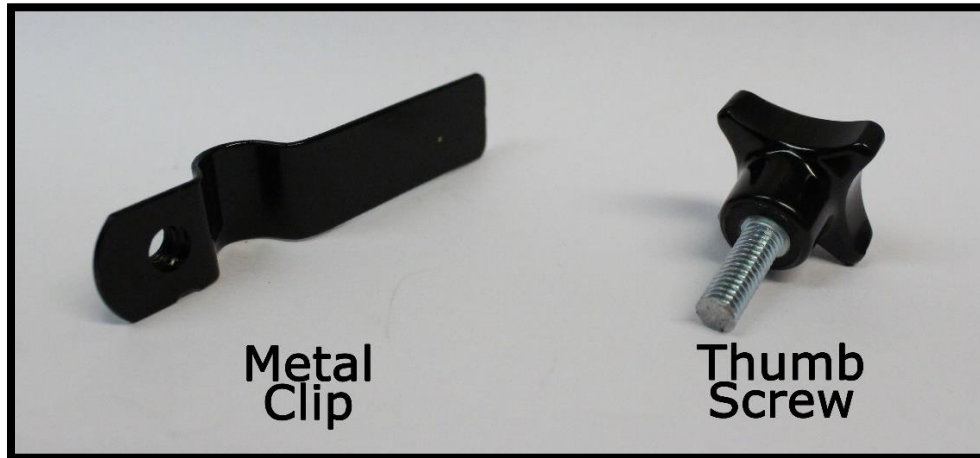

Barjo Cages & Guards Limited cannot accept responsibility for any damage incurred while fitting or from use of the tailgate guard. If the person fitting the tailgate guard has any doubt about the fitting, please contact a member of the team on Tel: 01189 890 240 from Monday to Friday (09.00 – 17.00) or via email [info@barjo.co.uk](mailto:info@barjo.co.uk)

Before starting remove any boot liners or matting from your boot. The guard will not fit properly with these sat underneath. You will be able to adjust the liners/matting to shape around the guard after it is fitted. Remove the door from the guard by opening it and lifting it off the pin hinges. This may require a bit of a wiggle. Open the vehicle's boot and place the guard in the opening. The bottom of the guard has two feet which will locate in the gap between the spare wheel cover and the boot sill.

The top of the guard has two plates, one on either side. These will locate with the aid of the metal clips provided on the two anchor points in the vehicle (pictured).

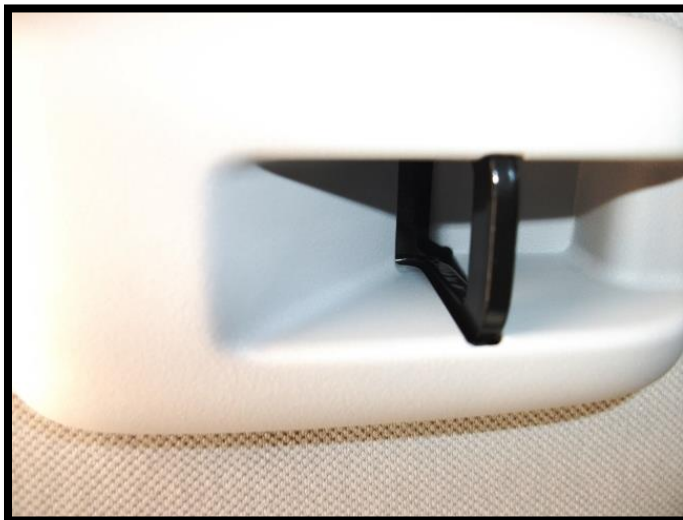

5. Hook the metal clip into the anchor point with the curve facing upwards and the hole facing toward the front of the vehicle (pictured)

6. Whilst holding the clip, insert the thumbscrew through the plate on the guard and secure it into the metal clips. When finished it will look like this:



Congratulations your Barjo tailgate guard is now ready for use.

### **Hint and Tips:**

The door stop may need adjusting if the door swings too far and hits the side of the car. To adjust, use a strong screwdriver to firmly but carefully bend the door stop towards the door opening.

To clean your guard, use a weak solution of waxed car shampoo then dry fully. With all moving parts treat with WD40 or a light machine oil.

The doors are tensioned to stop rattling. For ease of opening and closing Barjo recommends you apply slight pressure using one hand on the door before sliding bolts across.

The slide bolt lock is designed to accept a padlock. Please note a Barjo tailgate guard is designed to prevent a dog from escaping when the vehicle is parked, it is not designed as a security aid.